

(* INDICATES A NEW ROOM)

ROOM FINISH SCHEDULE								
NO.	ROOM NAME	FLOOR	BASE	WALL MATERIAL/ FINISH	TRIM	CEILING	CEILING HEIGHT	NOTES AND COMMENTS
100	VESTIBULE	NEW CPT-1	EXIST MOBR / NEW VB-1	EXIST BRICK - CLEAN	EXIST STAINLESS STEEL CORNER GUARDS.	EXIST ACT-1	11'-9"	FINISH SCHEDULE NOTES 7-REFER TO DOOR SCHEDULE, 19.
101	SALES AREA	NEW VCT-1	NEW VB-1	EXIST WALL PANELS TO BE PAINTED P-3(A) LATEX W/P-7(A) @ GYP BD ABOVE UP TO CEILING AT FRONT WALL. EXIST WALL PANELS TO BE PAINTED P-3(A) LATEX W/P-13(A) STRIPE & P-7(A) @ GYP BD ABOVE UP TO CEILING AT ALL OTHER SALES WALLS.	EXIST STAINLESS STEEL CORNER GUARDS. EXIST WOOD - PAINT P-3(B) EPOXY AROUND DOORS/WINDOWS/SAFE	EXIST ACT-1	11'-10"	FINISH SCHEDULE NOTES #1, 3, 5, 7-REFER TO DOOR SCHEDULE, 13, 15, 16, 17, 18, & 19. COORDINATE ALL PAINTING IN SALES AREA W/ FOOD LION CONSTRUCTION SUPERVISOR.
102	WORKROOM	NEW VCT-1	NEW VB-1	FULL HEIGHT GYP BD - PAINT P-7(A) EPOXY.	P-3(B) @ SAFE (INSIDE & OUTSIDE WORK ROOM). PANEL COVERS	EXIST ACT-1	11'-11 1/2"	FINISH SCHEDULE NOTES #1, 5-EXISTING TO REMAIN, 7-REFER TO DOOR SCHEDULE. HOT PRESSURE WASH EXISTING FLOORING.
103	DELI / BAKERY PREP	EXIST / NEW QUARRY TILE	EXIST QTB	EXISTING CWT FIELD. REPLACE EXISTING CWT ACCENT BAND (CWT-1)	P-18(B) PANEL COVERS / EXIST STAINLESS STEEL CORNER GUARDS.	EXIST ACT-3	8'-6"	RE: SHEET A2.02. FINISH SCHEDULE NOTE #7 - REFER TO DOOR SCHEDULE. HOT PRESSURE WASH EXISTING FLOORING.
103A	DELI / BAKERY COOLER	EXIST QUARRY TILE	EXIST QTB	EXIST PREFAB PNL	-	EXIST PRE-FAB PANEL	EXIST	FINISH SCHEDULE NOTE #12. HOT PRESSURE WASH EXISTING FLOORING.
103B	MEAT / DELI / BAKERY FREEZER	EXIST MTP	EXISTING	EXIST PREFAB PNL	-	EXIST PRE-FAB PANEL	EXIST	FINISH SCHEDULE NOTE #12
104	DELI / BAKERY CLOSET	EXIST QUARRY TILE	EXIST QTB	EXISTING FRP PANELS.	-	PLYWOOD P-4(B) EPOXY	8'-0"	FINISH SCHEDULE NOTES #7 - REFER TO DOOR SCHEDULE. HOT PRESSURE WASH EXISTING FLOORING.
105	CORRIDOR	NEW VCT-1	NEW VB-1	EXISTING CMU - PAINT P-7(C) EPOXY. EXISTING GYP BD - PAINT P-7(A) EPOXY.	EXIST STAINLESS STEEL CORNER GUARDS.	EXIST ACT-1	8'-11 1/2"	FINISH SCHEDULE NOTES #1 & 7-REFER TO DOOR SCHEDULE.
106	MEN'S RESTROOM	EXISTING CT	EXISTING CTB	EXISTING CWT - PATCH, REPAIR, REPLACE WHERE FIXTURES ARE REMOVED.	-	EXIST GYP BD-PANT P-4(A) EPOXY	7'-11 1/2"	FINISH SCHEDULE NOTES #7-REFER TO DOOR SCHEDULE.
107	WOMEN'S RESTROOM	EXISTING CT	EXISTING CTB	EXISTING CWT - PATCH, REPAIR, REPLACE WHERE FIXTURES ARE REMOVED.	-	EXIST GYP BD-PANT P-4(A) EPOXY	7'-10"	FINISH SCHEDULE NOTES #7-REFER TO DOOR SCHEDULE.
108	GROCERY STAGING	EXIST CONCRETE	EXISTING	EXIST CMU	-	EXPOSED STRUCTURE	EXIST	FINISH SCHEDULE NOTES #2, 4, 7-REFER TO DOOR SCHEDULE.
109	STORAGE FREEZER	EXIST MTP	FRPB	EXIST PREFAB PNL	-	EXISTING PRE-FAB PANEL	EXIST	-
110*	DEPARTMENT MANAGER'S OFFICE	NEW VCT-1	NEW VB-1	INSTALL NEW WALL PANELS (WP-2) - EXTEND 6" ABV CEILING.	WOOD - P-3(B) EPOXY.	NEW ACT-1 & GRID	7'-5"	FINISH SCHEDULE NOTES #1, 5, & 7-REFER TO DOOR SCHEDULE. PAINT VISIBLE WOOD UNDER SHELVES AND COUNTERS P-3(B).
111*	ASSOCIATE'S TRAINING ROOM	NEW VCT-1	NEW VB-1	INSTALL NEW WALL PANELS (WP-2) - EXTEND 6" ABV CEILING.	-	NEW ACT-1 & GRID	7'-5"	FINISH SCHEDULE NOTES #1, 5, & 7-REFER TO DOOR SCHEDULE. PAINT VISIBLE WOOD UNDER SHELVES AND COUNTERS P-3(B).
112*	LOUNGE	NEW VCT-1	NEW VB-1	INSTALL NEW WALL PANELS (WP-2) - EXTEND 6" ABV CEILING.	WOOD - P-3(B) EPOXY.	NEW ACT-1 & GRID	7'-5"	FINISH SCHEDULE NOTES #1 & 7-REFER TO DOOR SCHEDULE.
113	RECEIVING ROOM	EXIST CONCRETE	EXISTING	EXIST CMU	-	EXPOSED STRUCTURE	EXIST	FINISH SCHEDULE NOTES #2, 4, 7-REFER TO DOOR SCHEDULE.
114	RISER ROOM	EXIST CONCRETE	-	EXIST PLWD	-	EXPOSED STRUCTURE	EXIST	-
115	ICE CREAM FREEZER	EXIST MTP	FRPB	EXIST PREFAB PNL	-	EXISTING PRE-FAB PANEL	EXIST	-
116	DAIRY COOLER	EXIST CS	EXISTING	EXIST PREFAB PNL	-	EXIST PRE-FAB PANEL	EXIST	-
117	JANITOR'S ROOM	EXIST CONCRETE	-	PAINT CMU P-7(C) EPOXY	-	PLYWOOD P-4(B) EPOXY	7'-11 1/2"	FINISH SCHEDULE NOTE #7 (REFER TO DOOR SCHEDULE-FRAME ONLY). CLEAN EXISTING CAN WASH & FLOOR
118	MEAT PREP	EXIST QUARRY TILE	EXIST QTB	EXIST WHITE FRP.	-	EXISTING ACT-2 & GRID	9'-0"	FINISH SCHEDULE NOTE #7 - REFER TO DOOR SCHEDULE. HOT PRESSURE WASH EXISTING FLOORING.
118A	MEAT COOLER	EXIST QUARRY TILE	EXIST QTB	EXIST PREFAB PNL	-	EXISTING PRE-FAB PANEL	EXIST	FINISH SCHEDULE NOTE #12. HOT PRESSURE WASH EXISTING FLOORING.
118B	MEAT FREEZER	EXIST PREFAB PNL	-	EXIST PREFAB PNL	-	EXISTING PRE-FAB PANEL	EXIST	-
119	MEAT OFFICE	EXIST QUARRY TILE	EXIST QTB	EXIST PREFAB PNL. EXIST FRP - CLEAN.	-	EXIST PLWD - PAINT P-4(B) EPOXY.	8'-0"	FINISH SCHEDULE NOTE #7 - REFER TO DOOR SCHEDULE.
120	PRODUCE PREP	EXIST CS-RESEAL	EXIST CS-RESEAL	EXIST FRP - CLEAN. EXIST CMU - PAINT P-4(C) EPOXY	-	EXISTING ACT-2 & GRID	9'-0"	FINISH SCHEDULE NOTES #7 - REFER TO DOOR SCHEDULE. HOT PRESSURE WASH EXISTING FLOORING. REMOVE 2X6 WALL BASE.
120A	PRODUCE COOLER	EXIST QUARRY TILE	EXIST QTB	EXIST PREFAB PNL	-	EXIST PRE-FAB PANEL	EXIST	FINISH SCHEDULE NOTE #2. HOT PRESSURE WASH EXISTING FLOORING.
121	MECHANICAL ROOM	EXIST PREFAB FLOORING	-	EXIST PREFAB STRUCTURE	-	EXPOSED STRUCTURE	EXIST	-
201	MECHANICAL ROOM	EXIST CONCRETE	-	EXIST CMU	-	EXPOSED STRUCTURE	EXIST	FINISH SCHEDULE NOTE #7 - REFER TO DOOR SCHEDULE.
202	OFFICE	EXIST VCT	EXIST VB	EXIST WALL PANELS	-	EXIST ACT-1	7'-7"	FINISH SCHEDULE NOTE #7 - REFER TO DOOR SCHEDULE.

GENERAL NOTES:

- ALL CONSTRUCTION TO BE TYPE IIB OR BETTER (NCSBC)
- REFER TO SHEET A1.04 FOR ADDITIONAL CEILING INFORMATION.
- REFER TO SHEET A2.02 FOR SALES FINISH
- REFER TO CS-1 FOR NATIONAL ACCOUNT INFORMATION.
- REPLACE ANY BROKEN/ DAMAGED MATERIALS (ACT, FLOOR/WALL TILE, ETC.) TO MATCH EXISTING UNLESS NEW SPECIFICATION IS LISTED.
- DO NOT PAINT POLISHED ALUMINUM TRIM.
- REFER TO A1.05 FOR FLOOR FINISHES.
- ALL FLOOR FINISHES TO COMPLY W/ NCSBC 804.4.
- ALL CEILING AND WALL FINISHES TO COMPLY W/ NCSBC 803.11.
- ALL CAN WASHES TO COMPLY W/ NCSBC 1210.2.2.

FINISH SCHEDULE NOTES (35-17 DECOR):

- MARLITE BRAND PANELS (MBP): USE TRADITIONAL PROFILE ALUMINUM TRIM PIECES WITH A FACTORY FINISH TO MATCH MARLITE. INSTALL MARLITE BRAND PANELS PER MANUFACTURER'S SPECIFICATIONS. USE ONLY ACCEPTABLE MARLITE ACCESSORIES.
 - SEE FINISH MATERIAL/COLOR LEGEND FOR NEW MARLITE BRAND PANELS (MATCH EXISTING)
- CAULK 2x6 P.T. WOOD BASEBOARD AT COOLER/FREEZER PANELS & METAL STUD WALLS IN REAR AREA, TOP AND BOTTOM. PAINTED WITH P-4(B).
- ALL GYPSUM WALLBOARD TO BE PATCHED, TAPED, MUDDED AND SANDED (PAINT READY).
- GENERAL CONTRACTOR SHALL PAINT FIRE LANES IN REAR AREAS, IF REQUIRED.
- NEW MILLWORK LAMINATE TO BE FORMICA 899 "DESERT BEIGE" MATTE FINISH, REFER TO A4.06, PAINT EXISTING SUPPORTS & EXPOSED WOOD P-3(B) U.N.O. NEW SUPPORTS TO BE LAMINATED TO MATCH WORK SURFACE.
- REFER TO A4.03 & A2.02 FOR RESTROOM TILE & DELI-BAKERY TILE.
- DOORS AND FRAMES CUSTOMER FACING TO BE PAINTED P-3(B) & NON-CUSTOMER FACING P-3(B), UNLESS OTHERWISE NOTED. (EXCEPT ALUM. STOREFRONT DOORS & WINDOWS)
- WORKROOM COUNTER TO BE 2'-10" AFF / COUNTER IN DMO & ASSOCIATE'S TRAINING ROOM TO BE 2'-6" AFF, SHELVES TO BE 5'-0" AFF. SEE SHEET A4.06.
- ALL WOOD TRIM AT CEILINGS, TO BE PAINTED P-7(B)
- RESINIOUS DECORATIVE FLOORING SHALL BE PURCHASED FROM DUR-A-FLEX INC. (CONTACT: KEVIN STEPHENS 919-208-8662), OR PROTECTIVE INDUSTRIAL POLYMERS (CONTACT: STEVE MCCAMEY AT 804-937-5000).
- PAINT ALL EXPOSED FLOOR TO CEILING GYP BD EGGSHELL EPOXY. PAINT GYP BD ABOVE MARLITE EGGSHELL LATEX.
- PRE-FAB COOLER/FREEZER PANELS AND DOORS TO BE ELECTROSTATICALLY PAINTED P-18(B); COORDINATE PAINT METHOD W/FOOD LION CONSTRUCTION MANAGER.
- COORDINATE WITH FOOD LION CONSTRUCTION MANAGER FOR PAINTING OF WALLS, DOORS & FRAMES.
- PROVIDE 4" HIGH FIRE RETARDANT (FRT) PLYWOOD WITH FRT 2X6 WOOD BASE @ EXPOSED COOLER FREEZER WALLS - PAINT BASE PER NOTE #2 AND LEAVE PLYWOOD UNFINISHED.
- ALL WALLS BELOW 8' WITHOUT WALL PANELING SHALL BE PAINTED WITH P-7(B), EXCEPT THE SALES FLOOR WILL RECEIVE NEW WALL COVERING (SEE A2.02).
- SAFE & TRIM TO BE PAINTED P-3(B) ON SALES AREA SIDE AND P-3(B) ON WORK ROOM SIDE. (SAFE TO BE HAND MACHINE ROLLED NOT BRUSHED).
- ALL SALES FLOOR GWB WALLS TO RECEIVE SHERWIN WILLIAMS PROBLOCK OIL BASED PRIMER PRIOR TO PAINTING - SALES FLOOR ONLY.
- SALES AREA REFRIGERATION CHASES TO BE PAINTED P-7(A) EPOXY.
- SALES AREA & VESTIBULE COLUMNS TO BE SANDED, PRIMED & PAINTED P-7(C) EPOXY. DO NOT PAINT STAINLESS STEEL WRAPS.
- INSTALL NEW WINDOW FILM ON STOREFRONT GLAZING AT NEW CUSTOMER SERVICES LOCATIONS. WINDOW FILM TO BE BY LUMAR, DL-05-GR-SR-COF-GRAY.

RODENT PREVENTION NOTES:

A. ABANDONED REFRIGERATION PIT*: PIPES/LINES LEADING THROUGH THE CONCRETE SLAB UNDER REFRIGERATED/FROZEN CASES.

- CUT OFF THE PIPES/LINES EVEN WITH THE SLAB. CRIMP OR CAP OFF (UNUSED/DISCONTINUED PIPES) THE ENDS OF THE PIPES/LINES AND MAKE SURE THEY NO LONGER EXIT THE SLAB.
- FILL THE PIT/HOLE WITH SAND OR HYDRAULIC CEMENT, LEAVING 3" TO THE TOP OF THE SLAB.
- ADD 1/4" HARDWARE CLOTH ACROSS THE OPENING TO TIGHTLY FIT ALL SIDES.
- FILL THE PIT/HOLE TO THE TOP WITH 3" OF HYDRAULIC CEMENT.

B. NEW OR EXISTING "IN-USE" REFRIGERATION PIT*: PIPES/LINES LEADING THROUGH THE CONCRETE SLAB UNDER REFRIGERATED/FROZEN CASES.

- VOID OUT AROUND THE PIPES/LINES TO 3" BELOW THE SLAB.
- ADD 1/4" HARDWARE CLOTH ACROSS THE OPENING TO TIGHTLY FIT ALL SIDES.
- FILL THE OPEN VOIDED AREA WITH 3" OF HYDRAULIC CEMENT.
- NOTE: SOLID IN-TACT (I.E. PLASTIC, METAL) PIT INSERTS WOULD NOT REQUIRE OUR FILLING WITH SAND AND SEALING TOP WITH HYDRAULIC CEMENT.

C. PIPES/LINES LEADING THROUGH FLOOR PENETRATIONS SHOULD BE SEALED WITH HYDRAULIC CEMENT*.

D. MISCELLANEOUS HOLES IN THE BLOCK WALLS*:

- SEAL WITH PERMANENT SEALANT (HYDRAULIC CEMENT, ETC.)

E. WALK-IN COOLER/FREEZER UNITS: VOIDS ON TOP

- IF THE VOID BETWEEN WALK-IN UNITS AND/OR WALLS IS DETERMINED TO BE COVERED FOR WHATEVER REASON, DO NOT USE A SOLID MATERIAL SUCH AS METAL. RECOMMEND INSTALLING 1/4" HARDWARE CLOTH TO COVER THE VOID, TO ALLOW FOR PROPER VISIBILITY, INSPECTIONS, AND ACCESS AS NECESSARY.
- NO ITEMS ARE TO BE STORED ABOVE THE WALK-IN UNITS TO AVOID HARBORAGE AREAS FOR RODENTS.

F. WALK-IN COOLER/FREEZER UNITS: VOIDS ALONG ADJACENT SIDE WALLS

- SEAL VOIDS ALONG WALL AND FLOOR WITH CLEANABLE MATERIALS (METAL FLASHING, SEALED LIGHT COLOR PAINTED WOOD, ETC.).

G. MOP ROOM:

- PIPES NEED TO BE SEALED WITH SILICONE CAULK AND A FLANGE INSTALLED AROUND THE PIPES WHERE THEY ENTER THE WALL AND CEILING AREAS.

H. WALL PENETRATIONS (ALL AREAS):

- PERIMETER CINDER BLOCK WALLS - SEAL VOID WITH FLEXIBLE SEALANT.
- INTERIOR WALLS (PERISHABLE DEPARTMENTS) - SEAL PIPES WITH SILICONE CAULK AND A FLANGE INSTALLED AROUND THE PIPES WHERE THEY ENTER THE WALL.

I. SALES FLOOR:

- AREAS UNDER INSTALLED SHELVING UNITS NEED TO BE FREE OF DEBRIS AND SPILLAGE.

J. WALLS BEHIND THE DISPLAY CASES (DAIRY, DELI, MEAT, SEAFOOD, PRODUCE, FROZEN ETC.):

- CONSTRUCTION SPEC. TO INCLUDE SHEET ROCK ONLY USED TOWARD UPPER PORTION OF CASE.

K. SEALING THE EXPANSION JOINTS (INTERIOR AND EXTERIOR):

- EXPANSION JOINTS NEED TO BE SEALED WITH NON-PLIABLE MATERIAL SUCH AS SILICONE CAULKING OR SEALANT. DEPENDING ON THE SIZE OF THE OPEN AREA: LESS THAN 1/2" USE SILICONE CAULK, GREATER THAN 1/2" USE SEALANT.

FINISH MATERIAL/COLOR LEGEND:

FLOORS: (SEE SHEETS A1.05 FOR SPECIFIC MATERIALS)

CARPET
CPT-1 CARPET-PORTRICO DIPLOMAT "MINK"

CONCRETE
CS CONCRETE SEALER

QUARRY TILE
QT QUARRY TILE

CERAMIC TILE
CT CERAMIC TILE
CT-1 DAL TILE - HEATHLAND SERIES "AMBER HLO3" 12"x12" GLAZED CERAMIC FLOOR TILE (SEE G1 FOR GROUT DETAILS)

PORCELAIN TILE
PT-1 DAL TILE - REMINISCENCE SERIES, "AGED BEIGE" #RM21 UNPOLISHED 12"x24" FLOOR TILE IN A RUNNING BOND PATTERN (SEE G12 FOR GROUT DETAILS)

VINYL TILE
VCT-1 VINYL COMPOSITION TILE - ARMSTRONG EXCELON IMPERIAL TEXTURE, "FIELD GRAY" 51927 12"x12"

VCT-2 VINYL COMPOSITION TILE - EXCELON IMPERIAL TEXTURE "ANTIQUE WHITE" 51811 12"x12"

RESINIOUS
R-1 RESINIOUS TOPPING - COLOR FOOD LION #FL105. SEE FINISH SCHEDULE NOTE #10.
R-2 RESINIOUS TOPPING - COLOR FOOD LION #FL106. SEE FINISH SCHEDULE NOTE #10.

OTHER
MTP METAL TREAD PLATE

BASE:
VB-1 4" VINYL COVE BASE BY JOHNSONITE - MATTE BLACK 40

QUARRY TILE
QTB QUARRY TILE

CERAMIC TILE
CTB CERAMIC TILE

OTHER
MOBR MCQUE BOX RAIL
WD 2x6 P.T. WOOD

CEILING FINISHES: (SEE SHEET A1.04)

ACT-1 2X4 ARMSTRONG HUMAGUARD PLUS IN PRELUDE XL GRID
ACT-2 2X4 2" FOAM DOUBLE SIDED FIBERLITE FRP PANEL BY NUOO PRODUCTS
ACT-3 2X4 ARMSTRONG VINYL CLAD TILE IN PRELUDE XL GRID

FRP FIBER REINFORCED PANEL
GB PAINTED GYPSUM BOARD

TRIM:
ST-1 STAINLESS
ST-2 SCHLUTER - DILEX-CHK EBH111-011 STAINLESS STEEL COVE BASE
ST-3 SCHLUTER - RONDEC R0102E STAINLESS STEEL TRIM

ACROVYN
GR-1 ACROVYN-6090 FR-225N ACCENT RAIL (BLACK)

INTERIOR WALL FINISH PAINTING LEGEND:

(A) EG-SHEL
(B) SEMI-GLOSS
(C) LOW GLOSS
(D) FLAT
(E) ELECTROSTATIC

WALLS SURFACES: (REFER TO SHEET A2.02)

CERAMIC WALL TILE
CWT-1 DAL TILE-"ELEMENTAL TAN" 0166 6"x6" SEMI-GLOSS SEE (G13) FOR GROUT DETAILS
CWT-2 DAL TILE-"ARCTIC WHITE" 0190 6"x6" SEMI-GLOSS SEE (G11) FOR GROUT DETAILS
CWT-3 DAL TILE-"ARCTIC WHITE" 0190 6"x6" SEMI-GLOSS SEE (G12) FOR GROUT DETAILS
CWT-4 DAL TILE-"ELEMENTAL TAN" 0166 4"x4" SEMI-GLOSS SEE (G13) FOR GROUT DETAILS
CWT-5 DAL TILE-"URBAN PUTTY" 0161 6"x6" SEMI-GLOSS SEE (G11) FOR GROUT DETAILS
CWT-6 (NOT USED)
CWT-7 (NOT USED)
CWT-8 (NOT USED)

WALL PANELS/COVERING
WP-1 G00W-#144 MARLITE PANEL
WP-2 WHEAT #5347-54 MARLITE PANEL
WP-3 LAREDO OAK #324-52 MARLITE PANEL
WP-4 PLANTATION OAK #323-52 MARLITE PANEL
WP-5 PANTABLE WHITE #1001-B62 MARLITE PANEL
WP-6 (NOT USED)
WP-7 (NOT USED)
WP-8 (NOT USED)
WP-9 WHITE P-100 MARLITE FRP
WP-10 (NOT USED)
WP-11 (NOT USED)

CERAMIC WALL TILE
CWT-1 DAL TILE-"DESERT GRAY" X114 4"x4" SEE (G1) FOR GROUT DETAILS

PAINT: (REFER TO SHEET A2.02)

P-1 PAINT "SOFTER TAN" SW6141
P-2 PAINT "ORGANIC GREEN" SW6732
P-3 PAINT "MACADAMIA" SW6142
P-4 PAINT "PURE WHITE" SW7005
P-5 PAINT PANTONE #647 "FOOD LION BLUE"
P-6 PAINT "GRIZZLE GRAY" SW7068
P-7 PAINT "MARSHMALLOW" SW7001
P-8 PAINT "HIGHWAY TRAFFIC WHITE"
P-9 PAINT "POPULAR GRAY" SW6071
P-10 PAINT "TOWN TAUPÉ" SW7036
P-11 PAINT "EIDER WHITE" SW7014
P-12 PAINT "TRAFFIC YELLOW"
P-13 PAINT "MEDITATIVE" SW6227
P-14 (NOT USED)
P-15 (NOT USED)
P-16 (NOT USED)
P-17 (NOT USED)
P-18 PAINT "SMOKEY BEIGE" SW9087

PLASTIC LAMINATE:
PL-1 (NOT USED)
PL-2 FORMICA 899 "DESERT BEIGE" (MATTE FINISH)

INTERIOR GROUT FINISH LEGEND:

(G1) TO USE GROUT: CUSTOM BUILDING PRODUCTS "TRUFFLE" #549
(G2) TO USE GROUT: CUSTOM BUILDING PRODUCTS "OYSTER GRAY" #386
(G3) TO USE GROUT: CUSTOM BUILDING PRODUCTS "NEW TAUPÉ" #185
(G4) TO USE GROUT: CUSTOM BUILDING PRODUCTS "BONE" #362
(G5) TO USE GROUT: CUSTOM BUILDING PRODUCTS "COSTER" #381
(G6) TO USE GROUT: CUSTOM BUILDING PRODUCTS "NATURAL" #09
(G7) TO USE GROUT: CUSTOM BUILDING PRODUCTS "LINEN" #122
(G8) TO USE GROUT: CUSTOM BUILDING PRODUCTS "CAPE GRAY" #546
(G9) TO USE GROUT: CUSTOM BUILDING PRODUCTS "WINTER GRAY" #355
(G10) TO USE GROUT: CUSTOM BUILDING PRODUCTS "SAHARA TAN" #22
(G11) TO USE GROUT: CUSTOM BUILDING PRODUCTS "HAWAIIAN" #890
(G12) TO USE GROUT: CUSTOM BUILDING PRODUCTS "URBAN PUTTY" #172
(G13) TO USE GROUT: CUSTOM BUILDING PRODUCTS "LIGHT SMOKE" #145


NOTE: USE A 1/16" JOINT FOR CERAMIC TILE. USE A 3/16" JOINT FOR PORCELAIN TILE. ALL FLOOR TILE GROUT SHALL BE CEG-IG 100% SOLIDS INDUSTRIAL GRADE EPOXY GROUT BY CUSTOM BUILDING PRODUCTS (COLOR AS INDICATED IN DRAWINGS).



PROFESSIONAL'S SEAL:



CORPORATE SEAL:

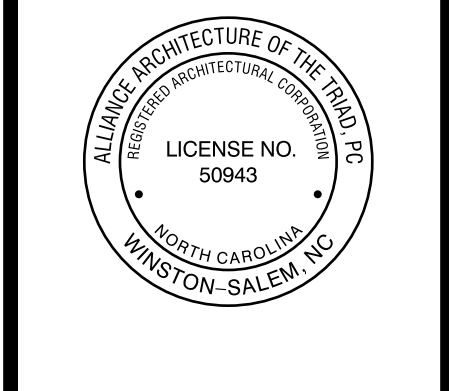

REVISIONS
NO DATE REMARKS



FOOD LION
REMODEL
STORE #0230
1320 SHELBY ROAD
KINGS MOUNTAIN, NC 28086

PROJECT NO: 0230FLMK24
DATE: 11/22/2024

19 OF 46
A6.01
ROOM FINISH
SCHEDULE

CHECKED: A.J.L DRAWN: VFS